


MHHZ0191C

General					
Refrigerant	Voltage	Compressor Type	Compressor Model	HP	Listings
R-404A	200-230/60/3	HERMETIC	CS12K6E-TF5	2HP	UL/CUL
Capacity (Btuh)					
At Room Temp. With a 10° TD, 90° Ambient					
-20	-10	0	30	35	40
			14661	16248	17867
At Room Temp. With a 10° TD, 100° Ambient					
-20	-10	0	30	35	40
				13504	
At Room Temp. With a 10° TD, 110° Ambient					
-20	-10	0	30	35	40
				11151	

Dimensional Data				
Overall			Base Size	Base/Hood
L	W	H		
38	27	18	M2	021M

Installation				
Wt. Lbs.	Receiver Tank 90%/90°F	Connections Liquid	Suction	Refrigerant
360	11.4	1/2	0.875	R-404A

Electrical							
MCA	MOP	comp volts	comp phase	comp hz	comp RLA	comp LRA	other volts
20	20	200/230	3	60	7.5	51	208/230
fan phase	fan hz	fan FLA	fan HP	fan quantity	other load phase	other load amps	Approximate Sound Level (Db)
1	60	0.5	1/20	2	1	0.5	77
max evap fan amps	max evap def heater amps	Total Heat Rejection BTUH					
5	15	20473					

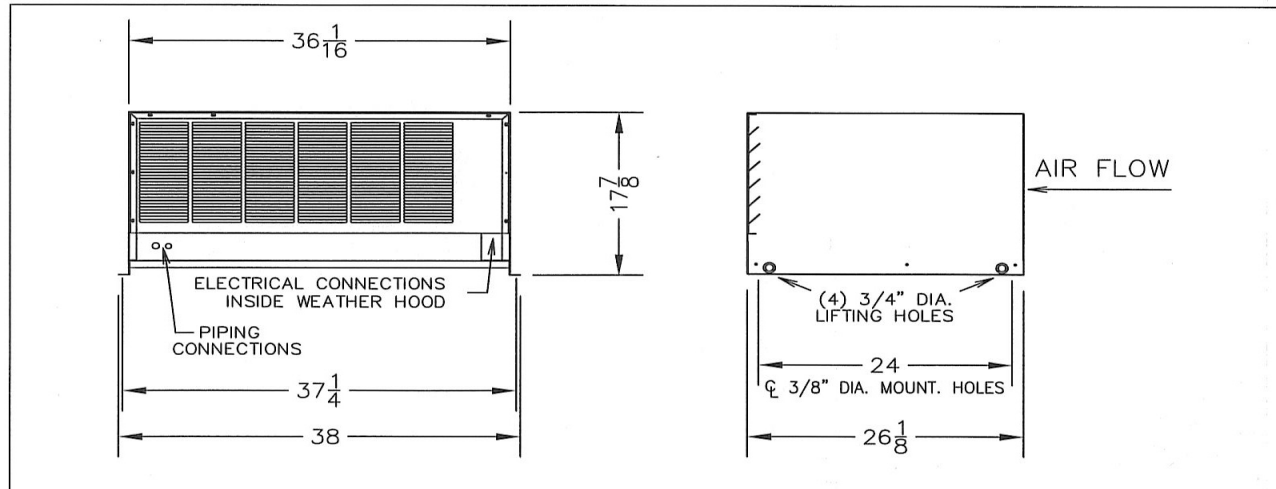

CONDENSING UNITS & REFRIGERATION SYSTEMS

