


# MSHZ0581C

General					
Refrigerant	Voltage	Compressor Type	Compressor Model	HP	Listings
R-404A	200-230/60/3	SCROLL	ZB45KCE-TF5	6HP	UL/CUL
Capacity (Btuh)					
At Room Temp. With a 10° TD, 90° Ambient					
-20	-10	0	30	35	40
			48996	53473	57879
At Room Temp. With a 10° TD, 100° Ambient					
-20	-10	0	30	35	40
				48466	
At Room Temp. With a 10° TD, 110° Ambient					
-20	-10	0	30	35	40
				43067	

Dimensional Data				
Overall			Base Size	Base/Hood
L	W	H		
48	31	26	M5	051M

Installation				
Wt. Lbs.	Receiver Tank 90%/90°F	Connections Liquid	Suction	Refrigerant
530	22.1	5/8	1.125	R-404A

Electrical							
MCA	MOP	comp volts	comp phase	comp hz	comp RLA	comp LRA	other volts
44	60	200/230	3	60	23.9	156	208/230
fan phase	fan hz	fan FLA	fan HP	fan quantity	other load phase	other load amps	Approximate Sound Level (Db)
1	60	1.6	1/4	2	1	0.5	73
max evap fan amps	max evap def heater amps	Total Heat Rejection BTUH					
7	35	67376					

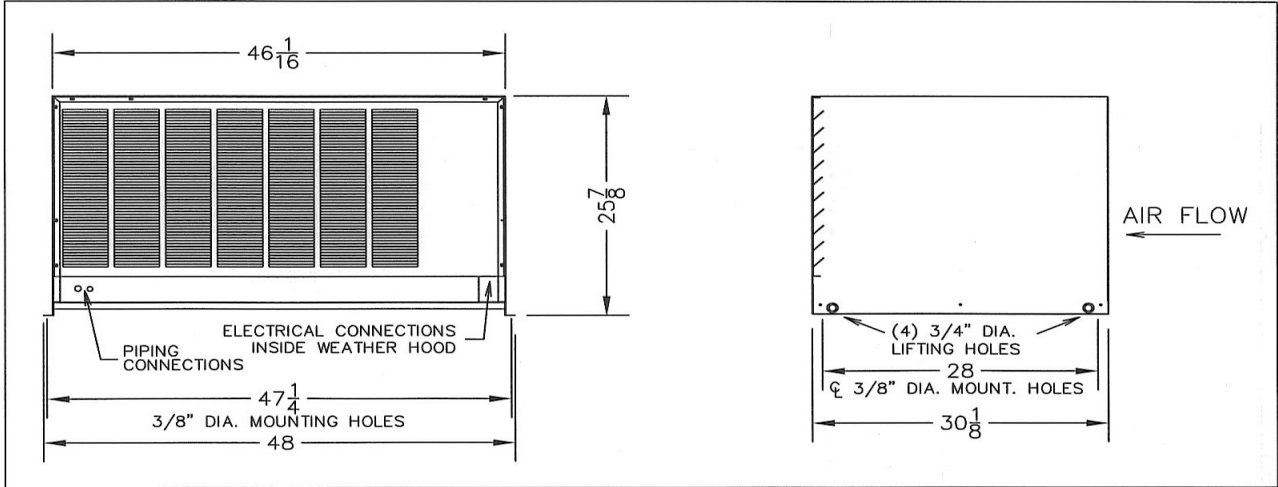

**CONDENSING UNITS & REFRIGERATION SYSTEMS**